

MARION COUNTY SURVEYOR'S OFFICE


SECTION CORNER RECORD

DEBRA S. JENKINS
MARION COUNTY SURVEYOR

SEC. 36 TWN. 15_N RNG. 3_E

BRYAN F. CATLIN, PLS
TECHNICAL SUPERVISOR

Date: 8-5-09
Party Chief: Wilcoxen
Crew: Finney
Type of Marker: Harrison
Method of Establishment: County: 2-21-01
IN S.P.C. E Zone, NAD 83
Name: 15033605
N: 494 386.161 9(m)
E: 58 651.329 2(m)

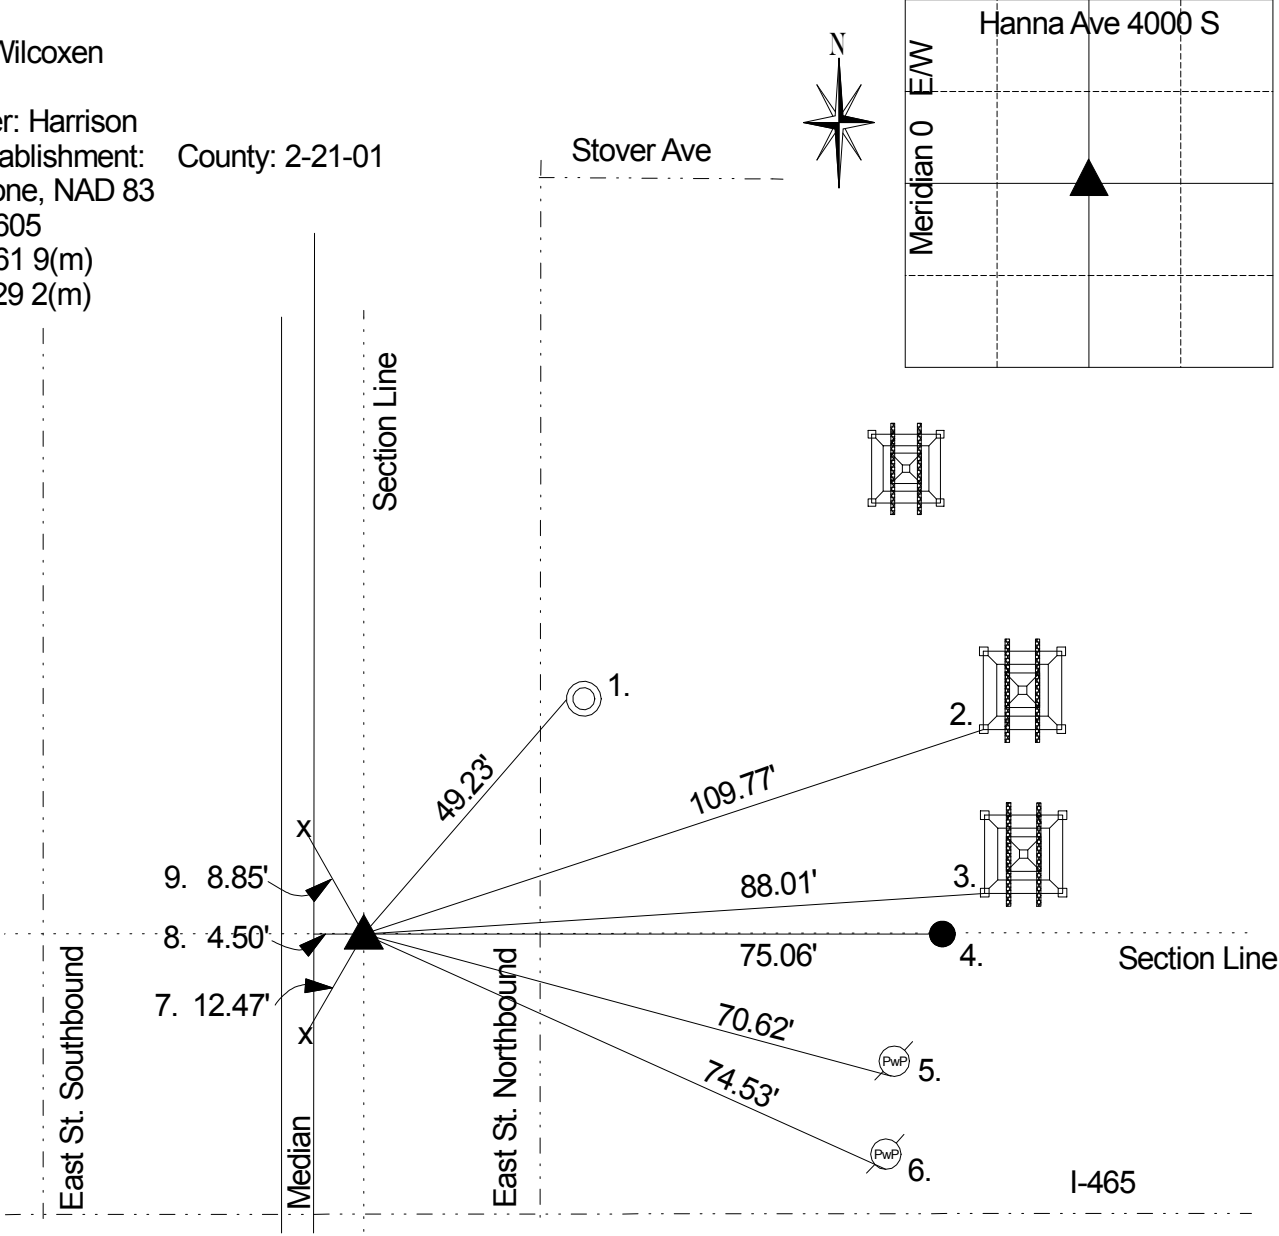

The center of 36-15-3 first appears in a survey 3-1861 by OW Voorhis, no monument called but witnesses per Perry Twp. Legal Survey Book pg. 38. 3-1879 H.B. Fatout used center but did not call description pg. 38. 12-1896 John Coyner called a stone at center. 3x5 card 3-26-1951 called monument as cut 'x'. State Highway plans for I-465 on line S-10-"ZZ" a station and offset is a brass plug on approximate 1/4 section line. ARB for 36-15-3 distances on the perimeter of NWQ are attributed to Scherschel dated prior to 1969. All ties were reported missing and corner obliterated due to I-465 construction. Plans show the corner location is in a fill area (10'x15'). 10-2000 MCSO established the location of center. Reset by 1) Arc x Arc distances from North Quarter and West Quarter per Scherschel survey on ARB map. 2) From East Quarter west through a record 1/4 1/4 corner and doubling the distance. 3) Prorated Arc x Arc from North Quarter south and South Quarter north from 3x5 card. The first three methods above all fell within a 4" diameter. Corner reset with a copperweld 2-21-2001. Harrison monument set by Wilcoxen 7-31-04. Retied-8-5-09 by Wilcoxen.

REF.	DISTANCE	DESCRIPTION
1.	49.23'	Cut 'x' W edge of sewer manhole rim
2.	109.77'	Cut 'x' in top of bolt SW leg of tower #1009 40" up
3.	88.01'	Cut 'x' in SW leg of tower #4966 40" up
4.	75.06'	3/4" Steel pin fd
5.	70.62'	Mag nail w/brass washer S PwP #269-697 A 24" up
6.	74.53'	Mag nail w/brass washer S PwP #211-697 A 36" up
7.	12.47'	Cut 'x' in curb
8.	4.50'	Due W to east face of curbed median
9.	8.85'	Cut 'x' in curb

THIS CORNER POSITION
REPRESENTS A "TITLE" CORNER
AND MAY NOT NECESSARILY
REPRESENT THE POSITION BASED
ON RECORD CORNERS.